



SCS Inkjet Coding Solution
PT. Sumber Cipta Solusi
Komplek Daan Mogot Baru
Jl. Jimbaran Blok LA 14 No. 6

Phone: 021 544 1932 / 021 540 8937
Fax: 021 540 8937
Email : alexanderglenn@scsmarking.com


U2
ProS

U2 ProS

Designed to Print on Everything Introducing New U2-ProS Ink Jet Printer



- Comprehensive solvent ink portfolio
- Wide range of substrates coverage
- UV ink solution for critical substrates

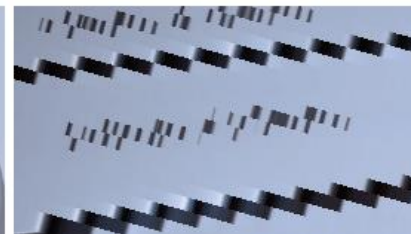

SCS
INKJET CODING SOLUTION
PT.SUMBER CIPTA SOLUSI



We Got You Covered



Coated Paper



Metal & Aluminum




Hard Plastic



Flexible Plastic



Critical Substrates

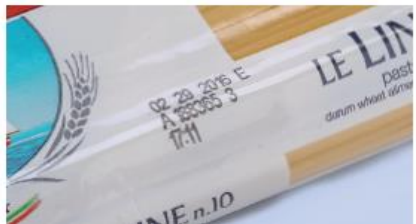



U2-ProS Specifications:

| | |
|--------------------------------|--|
| Display | 3.5" Color LCD with LED backlight |
| User Interface | Simple and easy-to-use operating system |
| Input Device | Pocket-sized IR remote keypad |
| Available Languages | English, Japanese, French, German, Spanish, Portuguese, Russian, Korean, Italian, Turkish, Hungarian, Slovak, Czech, Swedish, Romanian, Polish, Serbian, Bulgarian, Chinese (Traditional & Simplified) |
| LED Indicators | Alarm, Ink Low, Print, Run, Remote on/off |
| Print Engine | Hewlett-Packard Thermal Ink Jet Technology |
| Print Resolution & Print Speed | 600 x 300 dpi (76.2 m/min) Print quality is dependent on resolution and speed |
| Throw Distance | Recommended 6mm from nozzle to surface |
| Print Height | Up to 4 lines and 12.7mm (0.5"). Selectable font size from 2.7mm, 3.6mm, 5.5mm, 8mm, 10mm, 12.7mm |
| Print Capability | Alphanumeric, logos, date/time, shift code, counter, lot box code |
| Barcodes | Code-128, ITF-14(SCC-14), NVE(SSCC-18), EAN-128, PDF417, Data Matrix, QR Code, DUN-14, GS1 DataBar, UPCA, UPCE, EAN-13, EAN-8, Codabar, Code 25 Interleaved, Code-39 |
| Power | AC 100V~240V, 50/60Hz |
| Weight | 0.49 kg (1.08 lbs) - Cartridge and brackets not included |
| Dimensions | 114 (L) x 76 (W) x 60 (H) mm |
| Mounting Orientation | Horizontal or downside |
| Message Storage Capacity | Store up to 999 messages |
| Operating Temperature | 5°C – 40°C (41°F – 104°F) |
| Data Interface | RS-485 & USB |

Optional Accessories:

| | |
|---------------|--|
| Encoder | Provide high print quality on unstable conveyor |
| Photocell | Provide more reliable and precise sensing parameter |
| Alarm Kit | Alert users in the event of an incident |
| UV Curing Kit | Provide stable and reliable curing performance for S-UV series ink |

SCS Inkjet Coding Solution
 PT. Sumber Cipta Solusi
 Komplek Daan Mogot Baru
 Jl. Jimbaran Blok LA 14 No. 6

Phone: 021 544 1932 / 021 540 8937
 Fax: 021 540 8937
 Email : alexanderglenn@scsmarking.com

